

## SCISSOR LIFT QUOTATION WORKSHEET

Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Desired Delivery \_\_\_\_\_  
 Phone No. \_\_\_\_\_ Contact Email \_\_\_\_\_ State \_\_\_\_\_

## APPLICATION INFORMATION

How is lift to be used? \_\_\_\_\_

Equipment mounted to platform: \_\_\_\_\_

Product description: \_\_\_\_\_

Size: \_\_\_\_\_ W x \_\_\_\_\_ L x \_\_\_\_\_ H, WT = \_\_\_\_\_ LB

### Scissor Lift Information:

Quantity: \_\_\_\_\_ Capacity: \_\_\_\_\_ Platform Size: \_\_\_\_\_ W x \_\_\_\_\_ L

Height Info.: Raised \_\_\_\_\_  
 Lowered \_\_\_\_\_  
 Travel \_\_\_\_\_

Cycle Info.: Cycles/Hour \_\_\_\_\_  
 Raise Time \_\_\_\_\_ sec.

Other: \_\_\_\_\_

## SPECIFICATIONS

### Power Unit:

- External
- Internal
- None

### Plant Voltage:

- 110V Single Phase
- 220V Single Phase
- 220V Three Phase
- 440V Three Phase
- 208V Single Phase
- 575V Three Phase

### Control Voltage:



- 120VAC
- 24VDC
- 24VDC PLC Supplied By Customer

### Controls:

- Foot Pedal
- Hand Held Pendant
- No Controller
- Less All Electrical

### Options:

- Pit Mount
- Velocity Fuses
- Travel Stop (Limit/Prox)
- Regreasable
- Portable
- Skirting

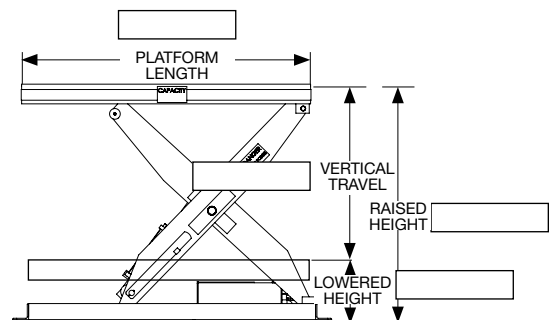

SCISSOR LIFT SHOWN IN RAISED POSITION