





## TANDEM SCISSOR LIFTS

- Ideal for long platform requirements
- Stable, double scissor set design
- Common applications include workstations for assembly, welding processes, heavy product manufacturing or work platforms

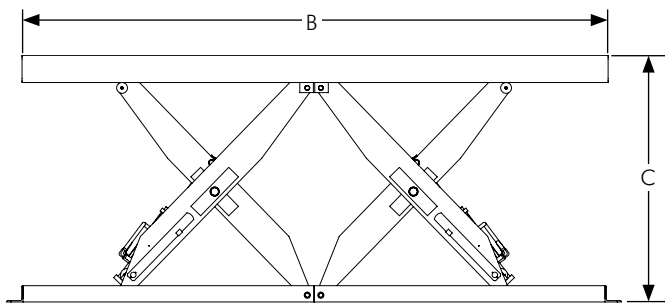

Scissor Lift Shown in Raised Position

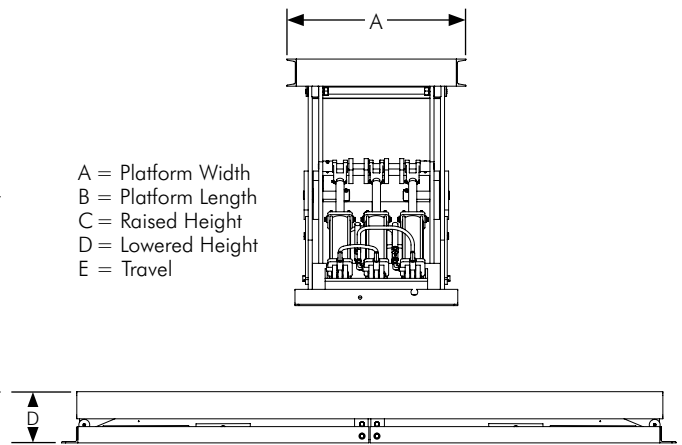

Scissor Lift Shown in Lowered Position

A = Platform Width  
 B = Platform Length  
 C = Raised Height  
 D = Lowered Height  
 E = Travel

LOAD CAPACITY (lbs.)	LOWERED HEIGHT (in.) (D)	TRAVEL (in.) (E)	RAISED HEIGHT (in.) (C)	PLATFORM DIMENSIONS (A X B) (in.)		LIFTING SPEED (SECONDS)	STANDARD MOTOR (HP)	STANDARD VOLTAGE/ PHASE/HZ
				STANDARD	MAXIMUM			
<b>24" TRAVEL</b>								
4000	8	24	32	30 x 102	54 x 126	28	1 (Internal)	115/1/60
8000	8	24	32	30 x 102	54 x 126	56	1 (Internal)	115/1/60
12000	8	24	32	30 x 102	54 x 126	84	1 (Internal)	115/1/60
<b>36" TRAVEL</b>								
4000	8	36	44	30 x 110	54 X 134	42	1 (Internal)	115/1/60
8000	8	36	44	30 x 110	54 X 134	84	1 (Internal)	115/1/60
12000	8	36	44	30 x 110	54 X 134	176	1 (Internal)	115/1/60
<b>48" TRAVEL</b>								
4000	8	48	56	30 x 134	54 x 158	23	3 (External)	240,460/3/60
8000	8	48	56	30 x 134	54 x 158	46	3 (External)	240,460/3/60
12000	8	48	56	30 x 134	54 x 158	69	3 (External)	240,460/3/60
<b>60" TRAVEL</b>								
4000	10	60	70	30 x 174	54 x 198	32	3 (External)	240,460/3/60
8000	10	60	70	30 x 174	54 x 198	64	3 (External)	240,460/3/60
12000	10	60	70	30 x 174	54 x 198	96	3 (External)	240,460/3/60
<b>72" TRAVEL</b>								
4000	12	72	84	30 x 206	54 x 230	32	3 (External)	240,460/3/60
8000	12	72	84	30 x 206	54 x 230	64	3 (External)	240,460/3/60
12000	12	72	84	30 x 206	54 x 230	96	3 (External)	240,460/3/60